

# WARM N QUIET SUBFLOOR INSTALLATION



**1** Unroll Warm N Quiet Subfloor™ and cut to fit. Leave a 3/8" gap around walls stairs and supports




**2** Butt edges together and tape seams with vapor barrier tape



**3** Install flooring in opposite direction of membrane seams to manufacturers specifications

This brochure is only a guide and is not intended to be an installation instruction. For detailed instructions refer to roll label or go to [www.superseal.ca](http://www.superseal.ca)

# PRODUCT BENEFITS

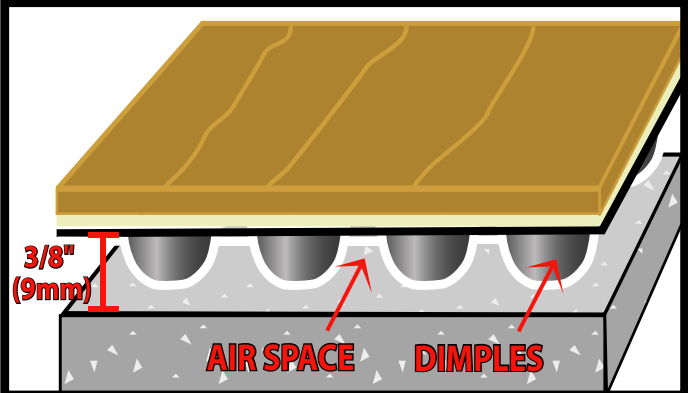

- Floors are warmer and more comfortable to walk on
- Easy to use and install
- Lightweight and easy to transport roll sizes
- Controls dampness
- Reduces footfall noise
- Resistant to mold and mildew



## Part# Roll Sizes

SF83108 3'3" x 32.8' (108 ft<sup>2</sup>)- 1m x 10m

SF83215 6'7" x 32.8' (215 ft<sup>2</sup>)- 2m x 10m

Height 5/16" (9mm) Strength 3200psf (150 kN/m<sup>2</sup>)

## Proudly Offered By

# INSULATED SOUND REDUCING SUBFLOOR

Laminate, Engineered Wood and Carpet



# SUPERSEAL

## Warm N Quiet Subfloor™

# PRODUCT BENEFITS

**Insulated Floors**  
 The dimples provide a thermal break and the foam layer enhances thermal insulation, allowing the floor to climatize to room temperature

**Footfall Sound Reduction**  
 The integrated dimple and foam layers decouple the floor from the substrate. This isolates and maximizes the reduction of impact sound and vibration caused by foot fall noise

**Controls Dampness**  
 The air space created by the dimples provide under surface ventilation that allows rising dampness from the substrate to dry

**Permanent Barrier**  
 Warm N Quiet Subfloor™ is a tough long lasting product that does not absorb moisture and helps stop mold and mildew

**Easy Installation**  
 It is quick and easy to install requiring no fasteners. It comes in user friendly, lightweight and easy to transport roll sizes

# LAMINATE, ENGINEERED WOOD & CARPET FLOORS




**Warm N Quiet Subfloor™ is a high performance and moderately priced subfloor that dramatically reduces footfall noise, insulates your floor and protects against moisture in one easy application**



## Carpet & Nail Down Hardwood

This brochure is only a guide and is not intended to be an installation instruction. For detailed instructions go to [www.superseal.ca](http://www.superseal.ca)

- Use a 5/8" or 3/4" T&G plywood (preferred) or OSB, on top of the membrane.
- Apply a subfloor adhesive to the tongue and groove, butt ends and install.
- Stagger the joints by 24", leaving a 1/4" around walls and pipes and allow glue to dry.
- Fasten loose or bulged areas with concrete or wood screws. Pre-drill holes for concrete.
- Linoleum, Tile and nail down Hardwood require an additional 3/8" (10mm) subfloor installed in the opposite direction of the above plywood. Fasten as per subfloor fastening requirements.

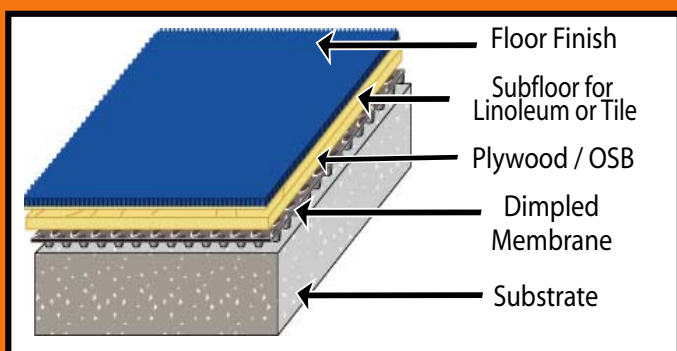

SPECIFICATIONS			
Dimpled Sheet	High Density Polyethylene (HDPE)		
Foam Layer	Closed Cell Polyethylene (PE)		
Compressive Strength	3,200 psf (150 kN/m <sup>2</sup> )		
Dimple Height	5/16" (8mm)		
Roll Sizes	6'7 x 32.8' - 215 ft <sup>2</sup> - (2m x 10m) 3'3 x 32.8' - 107.5 ft <sup>2</sup> - (1m x 10m)		
Sound Reduction*	26 db <small>Product Only</small>	FIIC 64	STC 62

\*Results vary based on construction technique